

AFT

SANDBANDER



Models with retractable support wheels allow even the lightest tractors to safely drive around with a full load

THE AFT SANDBANDER quickly installs 25mm - 35mm wide drainage slits, filling them at the same time with consolidated sand up to a depth of 250mm.

The unique blade design and fast oscillation create minimal heave and permit even moist sand to be used.

The ideal tool to quickly drain excess surface water to free draining subsoil or existing drainage systems.

Using sand rather than gravel ensures that essential moisture levels are retained in the root zones and that no harmful spills can damage mowers or players.

Designed for tractors from 20HP, it can safely work on sensitive areas like golf and bowling greens.



AFT TRENCHERS LIMITED

16/17 Addison Road, Chilton Industrial Estate, Sudbury, Suffolk CO10 2YW, United Kingdom
Tel: +44 (0)1787 311811 • Fax: +44 (0)1787 310888 • E-mail: info@trenchers.co.uk • www.trenchers.co.uk



Capacity: 1.0m³


Tractor requirements: from 20HP, hydrostatic transmission or creep speed drive, with an oil flow from 20L/min at 150 Bar.

Front weights are advised on smaller tractors.

If required, the Sandbander can also be used with gravel or similar backfilling materials.

The machine is designed for use in moist or very moist soils.

AFT SANDBANDER

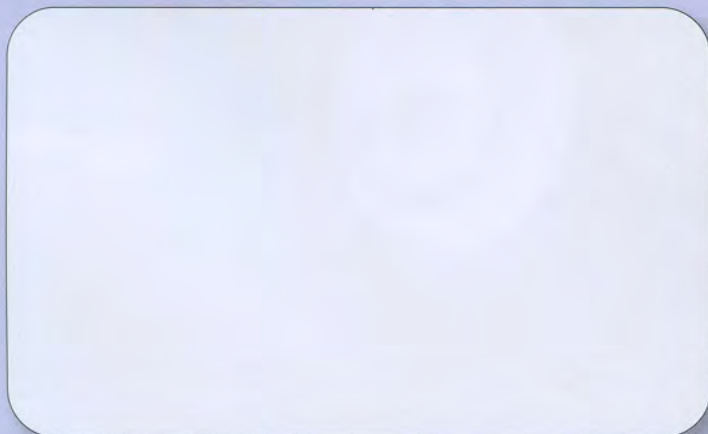

Our policy is one of continuous improvement, and we reserve the right to change specifications of equipment without notice. Illustrations do not necessarily show products to current specifications.